


DRIVEWAY RESINS

Primer and Base - 5 litre & 10 litre
For bonding 1 -3mm washed stone grit

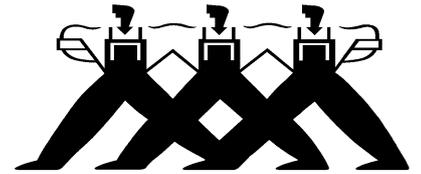

Property Repair Systems
01626 331351

An Ultra Low Disturbance
Building Solution

DRIVEWAY RESINS are Epoxy based surface treatment liquids for indoor and outdoor treatment of stable, smooth driveway, path and walkway surfaces where stone grit will be laid as a decorative surface. They contain no water or solvent and have high resistance to chemicals, abrasion, erosion and traffic. They are also suitable for industrial use in chemical and water treatment plants where acid and alkali resistance is required, applied to wood, some metals and masonry.

Special features

- moisture tolerant on laying
- waterproof
- vapour barrier
- resist heavy traffic wear
- resist weathering
- resist chemical attack
- suitable for drives, pathways, walls, floors, tanks.

DESCRIPTION

DRIVEWAY PRIMER is a clear to amber two part liquid epoxy, which chemically cures.

DRIVEWAY BASE is a grey two part liquid epoxy, which chemically cures.

TECHNICAL

Active Substance

BPF/BPA Epoxy Resins and Cycloaliphatic amine

Other Components/Mix Ratio/SG

Alkylglycidylether, 70% Base/30% Activator by weight, mixed Primer SG 1.08, Base SG 1.28.

Aggressivity to other materials

No known aggressivity to other materials.

Classification - Irritant

Coverage

Primer - smooth surface - max. 2sq.m/litre/coat

Base - smooth surface - max. 4sq.m/litre/coat

Mix ratios – by volume.

Do not vary the mix ratio

Primer - Clear – 2 Base/1Activator volume.

Base - Grey – 2.5 Base/1Activator by volume

Pot Life (min. laying temp. 10C)

10 minutes at 20C, 25 minutes at 10C in pot.

Drying/Curing (Maintain at least 15C)

Touch dry – 4 to 6 hours, hard in 16-20 hours

USES

DRIVEWAY PRIMER is used as a surface primer treatment on drives and paths.

DRIVEWAY GREY BASE is applied over tack free dried hard Driveway Primer to provide an adhesive layer to carry the decorative stone grit.

PREPARATION & USE

Clean off all debris and surface

contamination. Repair all cracks using our W60 Flexi Crack Grout, available in 3 litre buckets. Mask off all edges and protect plants & lawns.

Thoroughly mix the Driveway Primer with a paddle using an electric drill, using the A and B parts in the ratio supplied. Transfer the mix to another clean pot and re-mix. For part mixes measure in the correct ratio using accurate scales. Pour the mixed resin onto the drive and spread thinly using either a soft broom, squeegee or roller (medium pile). As soon as the Primer is hard repeat the mixing process with the Grey Base and then cover the whole area whilst wet with washed, dry aggregate.

Property Repair Systems - 01626 331351

DCM 10/15